

Gravity **WHEEL** Model "FX 200" Heavy-Duty

Flexible Gravity Skatewheel Conveyor



A proven performer for trailer loading and unloading. Ideally suited for packaging, shipping and flexible assembly lines. Order optional leg connect brackets to lock units together.

- Structural Steel Support: Channel steel spans the entire conveyor width for unequalled strength.
- 1-1/4" Side Plates: Aluminum alloy with ribbed construction for added durability. Assembled with shoulder bolts.



GRAVITY

Model Number	Width	Compacted to Expanded	Conveyor Height	Leg Sets Per Unit	Wheels Per Axle	Unit Weight
FX200-18-12-ST-5	18 in.	3 ft. to 12 ft.	28 1/2" to 41 1/2"	4	7	215 lbs.
FX200-18-24-ST-5	18 in.	6 ft. to 24 ft.	28 1/2" to 41 1/2"	7	7	429 lbs.
FX200-24-12-ST-5	24 in.	3 ft. to 12 ft.	28 1/2" to 41 1/2"	4	9	252 lbs.
FX200-24-24-ST-5	24 in.	6 ft. to 24 ft.	28 1/2" to 41 1/2"	7	9	504 lbs.

**24 HOUR SHIPMENT SUBJECT TO AVAILABLE STOCK
24 HOUR SHIPMENT NOT GUARANTEED.**

• **Standard Specifications**

WIDTHS-18 in. and 24 in.

FRAME-Flexible and extendible.

LENGTHS-12 ft. and 24 ft.

EXPANSION RATIO-4:1

FLOOR SUPPORTS-Adjustable type 28-1/2" to 41-1/2".

WHEELS-1.9 in. dia. with 1/4 in. bore.


PACKAGE STOP-Folds down when not in use.

CASTERS-Swivel casters with locking brake.

CAPACITY- 200 lbs. capacity per linear foot.

• **Optional Equipment**

LEG CONNECT BRACKETS-Connecting two or more conveyors.

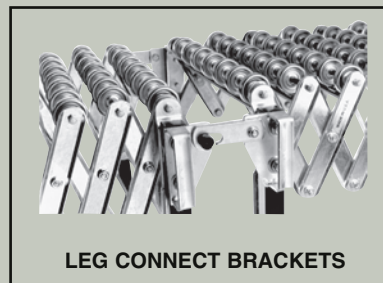

LEG CONNECT BRACKETS

