

GAPPER

Horizontal Belt Gapping Conveyor (Slider Bed)



Conveyor shown with optional floor supports

The model Gapper is designed for feeding sawtooth merges, combiners, sorters, or other equipment where gaps must be pulled between cartons.

- 5 Belt Widths
- High Grip Longitudinally Grooved Belt
- Pop-Out Roller
- Adjustable MS-Type Floor Supports Available
- 6 Speed Gap Ratios



SIZE TO ORDER Overall Length	Belt Width	12"	18"	24"	30"	36"
	Between Rail Width	15"	21"	27"	33"	39"
	Overall Frame Width	18"	24"	30"	36"	42"
12'	Weights	905	1059	1208	1360	1512
Weight Per Foot		21	28	35	42	47

NOTE: 12'-0" OAL Minimum with 12", 18" & 24" Belts


NOTE: 12'-6" OAL Minimum with 30" Belt

NOTE: 15'-0" OAL Minimum with 36" Belt

SLIDER BED

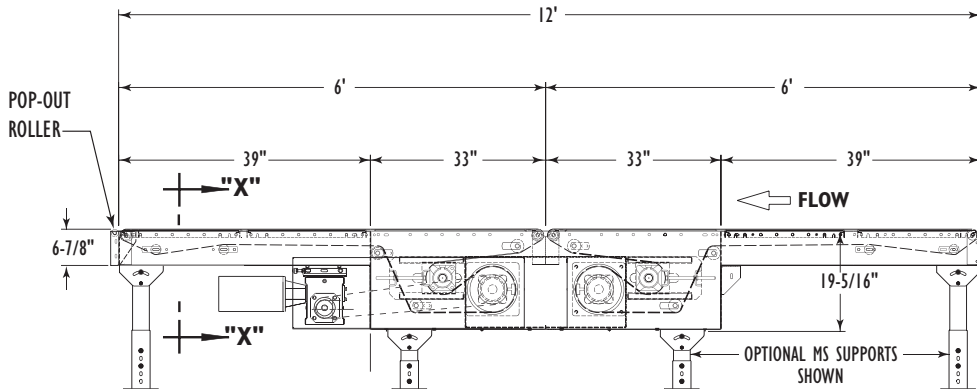

OPTIONAL ROUND END

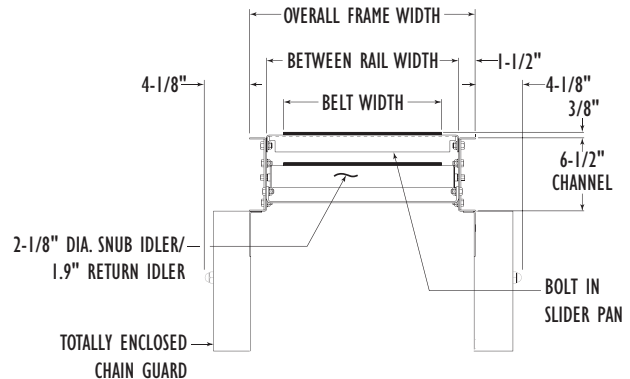

SECTION "X-X"



• Standard Specifications

Model GAPPER

BELT—High grip longitudinally grooved belt; NSL 10ELBV-UX-1-SP lacing.

BED—12 ga. galvanized slider pan mounted in 6-1/2 in. x 12 ga. powder painted formed steel channel frame.

CENTER DRIVE—Provides 16 in. of belt take-up. Minimum elevation—20 in. Chain guard located on left hand side.

DRIVE PULLEY—8 in. dia. with 1-11/16 in. dia. shaft at bearings, machine crowned and fully lagged.

TAIL PULLEY—2-1/4 in. dia. with 3/4 in. dia. shaft at bearings, machine crowned.

POP OUT ROLLER—1-3/8" with high speed bearing on discharge only.

SNUB IDLER—Adjustable 2-1/2 in. dia. pre-lubricated ball bearings.

RETURN IDLER—Adjustable 1.9 in. dia. pre-lubricated ball bearings.

BEARINGS—Sealed, pre-lubricated, self-aligning, ball bearings on drive and tail shafts. Pre-lubricated ball bearings in tread rollers.

SPEED REDUCTION—Sealed worm gear C-Face speed reducer. No. 60 roller chain to drive pulley.

MOTOR—1 HP-208/230/460/575V-3 Ph.-60 Hz. Totally Enclosed C-Face.

FLOOR SUPPORTS—Now supplied as optional equipment.

Discharge Belt Speed	Conveyor OAW				
	18	24	30	36	42
	HP				
65	1	1	1	1	1
100	1	1	1	1	1
150	1	1	1	1	1
200	2	2	2	2	2
250	2	2	2	2	2
300	2	2	2	2	2
350	2	2	2	3	3
400	3	3	3	3	3
450	3	3	3	3	3
500	3	3	3	3	5
550	3	3	3	5	5


NOTE: As cartons pass from the infeed belt to the higher speed discharge belt, a gap is created between cartons according to the following formula:

FORMULA

$$\frac{\text{Length of Box} + \text{Final Gap}}{\text{Length of Box} + \text{Initial Gap}} = \text{Speed Gap Ratio (SGR)}$$

$$\text{Infeed Belt Speed} = \frac{\text{Discharge Belt Speed}}{\text{SGR}}$$

SGR
1.25
1.50
1.75
2.00
2.25
2.50

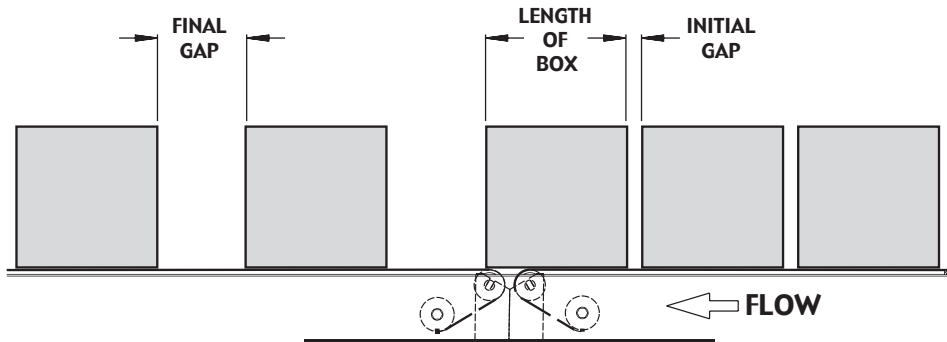

• Optional Equipment

FLOOR SUPPORTS—MS Type floor supports are available with a wide range of adjustment. Specify top of belt or roller elevation. One support required at every bed joint and ends of conveyor. Holes in feet for lagging to floor. Knee braces recommended above MS-6 support.

GUARD RAILS—Adjustable Universal Channel Guard Rail, overlapping fixed channel (one direction).

ROUND END—For feeding combiners, or other equipment where the pulley needs to extend past the frame. Allow 5" extension.

O-RING DRIVE CHAIN—With sealed in lubricant (Recommended for applications that do not permit regular lubrication).

MOTORS—Energy efficient, single phase, brakemotor, other characteristics. 3 HP maximum.

CASTERS—See Accessory section.

ELECTRICAL CONTROLS—One direction manual start switch, non-reversing starters, push button stations, encoders. AC variable frequency drive.

LENGTH—Optional Lengths available in 3" increments. Minimum discharge 6', Minimum infeed 4', Maximum discharge 12'9", Maximum infeed 12'9". Horsepower will be affected.

